

Top-Locking Slats

As an alternative approach to our Bottom-Locking Slat, these slats also provide an economical and attractive way to enhance any chain link fence. The locking system is located near the top of the slats to ensure a clean, straight edge, further enhancing its appearance.

FEATURES

Design: Top-Locking Slats are flat and tubular in shape, with circular notched out holes located near the top of the slat.

Fast & easy installation: There is no need to kneel down! Simply insert the slats vertically from top to bottom, keeping the locking holes on top. Then thread the flexible locking channel horizontally through the notched holes in the slats. These holes are elliptical to ensure they always stay open for fast and easy threading.

Standard heights: 4, 5, 6, 7, 8, 10, & 12 feet.

Slat length: 2" shorter than the overall height of fence.

Flexible, top-locking channel: Also available on a continuous 200 ft. reel for larger jobs.

Wind load & privacy factor: Approximately 75%.



- White 
- Green 
- Brown 
- Black 
- Beige 
- Grey 
- Redwood 
- Lt. Blue 

* Exact representation of slat colors in printing is difficult. Please refer to actual color samples for final matching.



SIZE SPECS

Slat Type	Slat Width	Mesh Size	Wire Gauge	Slats per Bag	Approx. Coverage per Bag
Top Lock 2"	13/32	2"	9 or 11	82	10 linear feet
Top Lock 2 1/4"	1 1/4"	2 1/4"	11 1/2 or 11	78	10 linear feet
Top Lock 1 3/4"	1"	1 3/4"	11	100	10 linear feet
	1"	2"	6	100	10 linear feet

Winged Slat®

Extra Privacy

When you need increased privacy, our Winged Slat® is the answer. With the proven quality and durability of our standard slats plus unique “wings” for extra screening and security, these slats are self-locking – no channels are needed!

FEATURES

Unique patented design: Includes a rigid, flat tubular body, with “legs” inside for extra support. Flexible and resilient wing portions are positioned on each side of the slat body. Serrations are added to the wings for easier installation and locking power.

Installation: Insert the slats vertically into the fence, from top to bottom – no tool is necessary. That’s it! The serrated wings grip the knuckles of the wire mesh, securing the slat in the fence.

Note: Additional time should be allowed for installation.

Standard heights: 4, 5, 6, 7, and 8 feet. For heights exceeding 7 feet, we recommend using (2) two half sizes (i.e. for 10 ft. fence use two 5 ft. slats) this will help during installation and will not lessen privacy.

Wind load and privacy factor: Approximately 90%.

Slat length: 2” shorter than overall height of fence.



- White 
- Green 
- Brown 
- Black 
- Beige 
- Grey 
- Redwood 
- Lt. Blue 

* Exact representation of slat colors in printing is difficult. Please refer to actual color samples for final matching.

Covered by one or more of the following patents:
US patent 5,184,801 / 5,687,957



SIZE SPECS

Slat Type	Slat Width	Mesh Size	Wire Gauge	Slats per Bag	Approx. Coverage per Bag
Winged Slat	1.45"	2"	9	82	10 linear feet

Aluminum Fence Lattice



For that classic lattice look, turn to our Aluminum Fence Lattice. Its handsome design in 8 attractive colors will enhance your chain link fence for years to come.

FEATURES

Design: Manufactured of extruded aluminum with a gloss baked enamel finish.

Fast & easy installation: Insert the slats diagonally, then lock into place. These durable aluminum slats add contrast without sacrificing style.

Coverage: each box contains (50) fifty pieces, which covers approximately (10) ten linear feet of fence.

Wind load and privacy factor: Approximately 80%.

* Special colors available upon request. Call for details.

- White 
- Green 
- Brown 
- Black 
- Beige 
- Grey 
- Redwood 
- Royal Blue 


* Exact representation of slat colors in printing is difficult. Please refer to actual color samples for final matching.



SIZE SPECS

Slat Type	Slat Width	Mesh Size	Wire Gauge	Approx. Coverage per Box
Fence Lattice 2"	17/8"	2"	9 or 11	10 linear feet
Fence Lattice 2 1/4"	2"	2 1/4"	11 1/2 or 12	10 linear feet

Fence Weave®

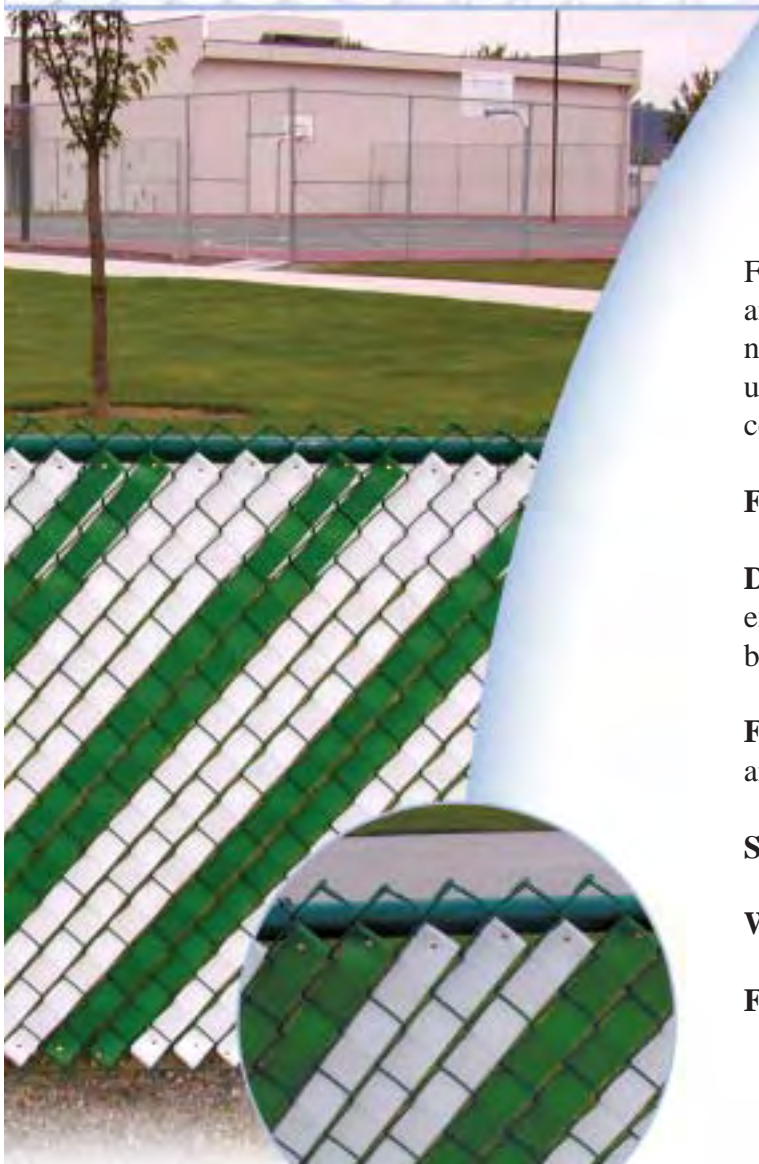

Fence Weave® has been enhancing chain link fence since 1963. As an attractive companion for any chain link fence, Fence Weave is a natural fit for homeowners who would like to do it themselves. Its unique packaging is easy to display in retail and home improvement centers.

FEATURES

Design: Fence Weave slats are made of flexible polyethylene extrusion (LDPE). The slats come in (9) nine standard colors listed below.

Fast & easy installation: Simply weave into chain link fence, cut, and fasten with provided copper fasteners.

Standard size: Each roll is 250 feet and covers 40 square feet.

Wind load and privacy factor: Approximately 70%.

Fence size: For residential applications.

- White 
- Green 
- Brown 
- Black 
- Silver 
- Sandlewood 
- Redwood 
- Royal Blue 
- Lt. Blue 

* Exact representation of slat colors in printing is difficult. Please refer to actual color samples for final matching.



SIZE SPECS

Slat Type	Slat Width	Mesh Size	Wire Gauge	Approx. Coverage per Box
Fence Weave	1 7/8"	2"	9 or 11	10 linear feet
Fence Weave	1 7/8"	2 1/4" - 2 3/8"	11 1/2" or 12	10 linear feet



HedgeLink™ creates a natural hedge look on chain link fence, which requires no maintenance, water or trimming.

FEATURES

Design: Core is made with 16-gauge, braided galvanized wire. The needles are made with 3-mil PVC.

Fast & easy installation: Requires no locking device or tools. HedgeLink installs much like our classic Bottom-Locking or Top-Locking slats.

Standard heights: 4, 5, 6, and 8 feet.

Fence size: For most fence sizes. Not intended for use with mini-mesh wire.

- UV stabilized to protect against the harmful rays of the sun.
- Flame retardant
- 10-year pro-rated warranty
- Blue Spruce type colored PVC needles

Do not mix HedgeLink with any other manufacturer's hedge product – color shades are different.



Slat Type	Slat Width	Mesh Size	Wire Gauge	Pieces per Box	Approx. Coverage per Box
HegdeLink	----	2" & 2 ¹ / ₄ "	9, 11 or 11 ¹ / ₂ "	82	10 linear feet

Fence Products Specifications

MATERIALS

PDS® Fence Products are extruded from High Density Polyethylene (HDPE), color pigments and ultra violet (UV) inhibitors, specifically designed to retard the harmful effects of the sun and lengthen the life of the product. The only exceptions are:

- Winged Slats® which also include Ethyl Vinyl Acetate (EVA), which is a softer plastic to keep the wings flexible and resilient.
- Missing Link® panels which are extruded from Poly Vinyl Chloride (PVC).
- HedgeLink™ is made with 16 gauge galvanized braided wire and needles are made with 3-mil (PVC).
- Aluminum Fence lattice is manufactured of extruded aluminum with a gloss-baked enamel finish.
- Fence Weave is extruded from LDPE.

HDPE TECHNICAL PROPERTIES

Property	Value
Melt Index	(.6) A low melt index indicates improved stress and crack resistance
Density	(.957) Polyethylene ranges anywhere from .914 to .960 in density. A higher density yields maximum stiffness without becoming overly brittle.
Minimum Temp.	(-76° F) Polyethylene stays flexible even at this temperature extreme.
Maximum Temp.	(250° F) Polyethylene does not distort until reaching this temperature.
Tensile Strength	(3,700 psi) Material will not suffer distortion at lesser loads or impacts.

PVC TECHNICAL PROPERTIES

Property	Value
Specific Gravity	1.45 +/- .02
Minimum Temp.	0° F
Maximum Temp.	160° F
Tensile Strength	6,200 psi
Flexural Strength	12,000 psi
Impact Strength	4.0 ft-lb/inch @ 23° C (73° F)

DURABILITY

PDS® HDPE & PVC Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillate's, and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminant's is quickly accomplished with plain water.

COLOR DISCLAIMER

Due to limitations and variations in the printing process, the color charts shown are only approximations of the actual fence product material color. Sample color swatch kits are available from your authorized PDS™ Fence Products distributor and their dealers.

LIMITED WARRANTY

PDS Fence Products carry a 25-year pro-rata warranty against breakage under normal conditions. Our LiteLink, HedgeLink and Missing Link carry a 10-year, pro-rata warranty. Write Bunzl Extrusion for full warranty information.

